

ET Module

ET-M53620 20Wp

EFFICIENCY


- Low voltage-temperature coefficient ensures high-temperature operation
- Exceptional low-light performance combined with high sensitivity to light enables excellent energy delivery

MATERIALS

- Highest quality, high-transmission tempered glass provides enhanced stiffness and impact resistance
- Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- A sturdy, anodized aluminum frame allows modules to be easily roof-mounted with a variety of standard mounting systems
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells

BENEFITS

- Manufactured in an ISO 9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship

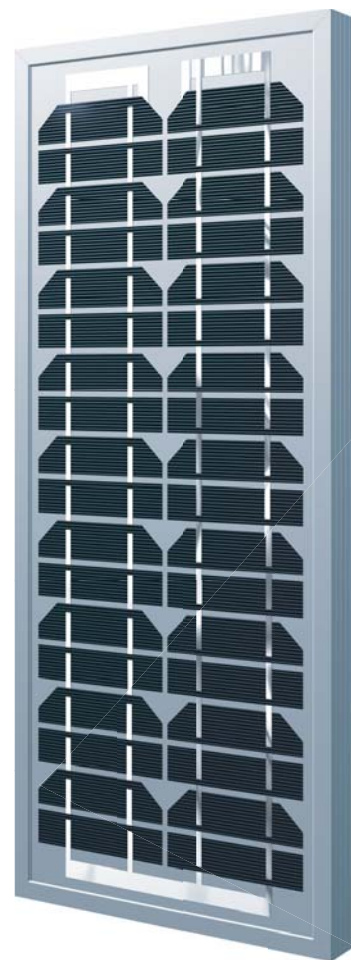

Available from: www.solar-wind.co.uk

ET SOLAR GROUP

ET Solar China

24F, A2 World Trade Center Mansion,
67 Shanxi RD, Nanjing 210009, China
Tel: +86 25 8689 8096 Fax: +86 25 8689 8097
Email: sales@etsolar.com

ET Solar USA

4900 Hopyard Road, Suite 290,
Pleasanton, CA 94588, USA
Tel: +1 925 4609 898 Fax: +1 925 4609 929
Email: sales@etsolar.us

ET Solar Europe

ET Solar GmbH, Munich City Tower,
Landsbergerstr. 110 / 9 Fl. D-80339 Munich, Germany
Tel: +49 89 309040 263 Fax: +49 89 309040 466
Email: sales@etsolar.de
(Italy Office) Tel: +39 392 2340606 Email: sales@etsolar.it

ET Module


ET-M53620

SPECIFICATIONS


Model type	ET-M53620
Peak power(Pmax)	20W
Weight	2.7kg (6.0lbs)
Dimensions	662×299×34mm 26.1×11.8×1.3inch
Maximum power voltage (Vmp)	17.82V
Maximum power current (Imp)	1.14A
Open circuit voltage (Voc)	21.96V
Short circuit current (Isc)	1.27A
Maximum system voltage	DC 1000V
Temp. Coeff. of Isc (TK Isc)	0.06 %/ °C
Temp. Coeff. of Voc (TK Voc)	-0.397 %/°C
Temp. Coeff. of Pmax (TK Pmax)	-0.549 %/°C
Normal Operating Cell Temperature	44.4±2°C

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C.

PHYSICAL CHARACTERISTICS Unit:mm(inch)

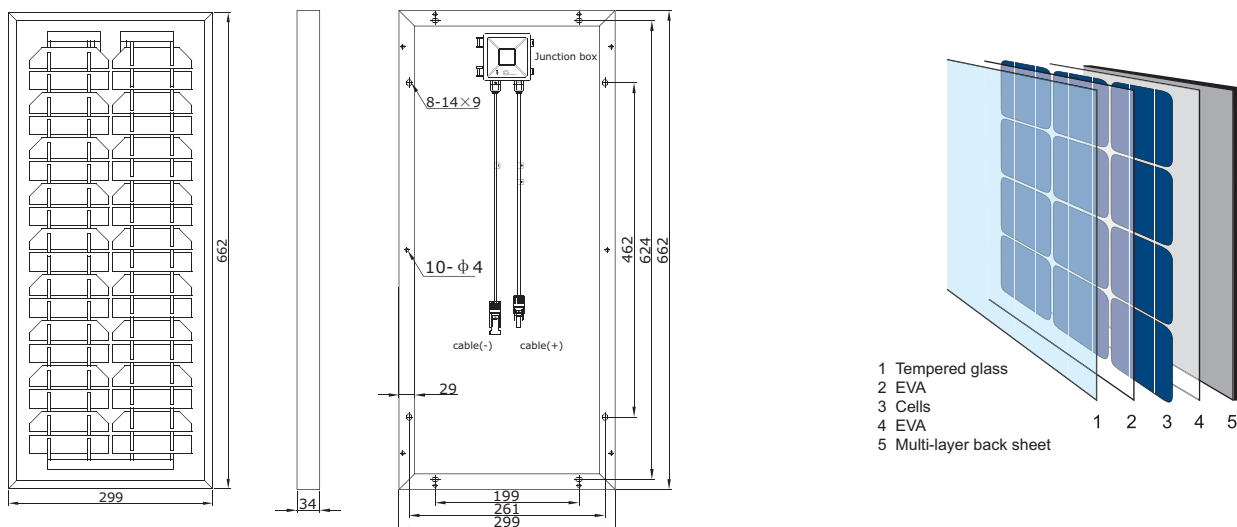

Electrical Performance cell temperature:25°C

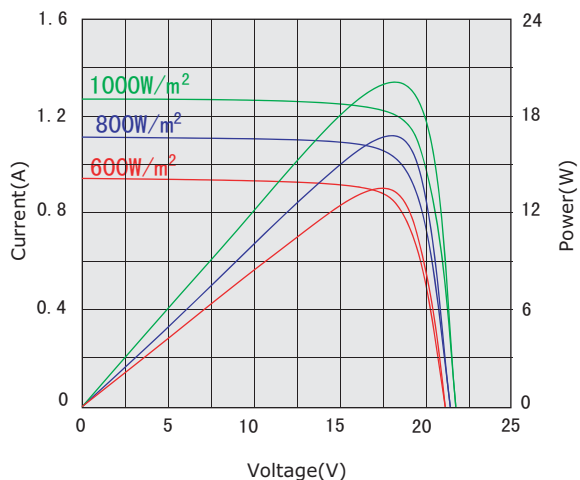

Temperatur dependence of Isc,Voc and Pmax

